

BEGA**84 604**

Garden and pathway luminaire



Project · Reference number

Date

Product data sheet

Application

LED garden and path luminaire with unshielded light. Trellised luminaire with square layout and thick-walled crystal glass for effective illumination in private gardens.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 Crystal glass with optical structure
 Silicone gasket
 Luminaire with anchorage unit for fixing in the soil
 The anchorage unit is made of galvanised steel according to EN ISO 1461
 Line connector for mains supply cable up to \varnothing 13 mm · max. $3 \times 2,5^{\square}$
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK06
 Protection against mechanical impacts < 1 joule
 – Safety mark
 – Conformity mark
 Weight: 3.8 kg

Inrush current


Inrush current: 7 A / 112 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:
 B 10A: 38 luminaires
 B 16A: 61 luminaires
 C 10A: 64 luminaires
 C 16A: 102 luminaires

Lamp

| | |
|-----------------------------|-----------------------------------|
| Module connected wattage | 2.9 W |
| Luminaire connected wattage | 4 W |
| Rated temperature | $t_a = 25^{\circ}\text{C}$ |
| Ambient temperature | $t_{a \max} = 55^{\circ}\text{C}$ |

84 604 K3

| | |
|-------------------------------|--------------|
| Module designation | LED-0280/930 |
| Colour temperature | 3000 K |
| Colour rendering index | CRI > 90 |
| Module luminous flux | 465 lm |
| Luminaire luminous flux | 262 lm |
| Luminaire luminous efficiency | 65,5 lm/W |

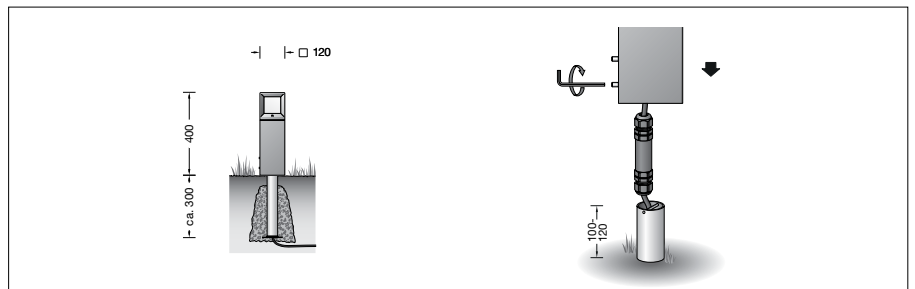

Service life · Ambient temperature

| | |
|--|--|
| Rated temperature $t_a = 25^{\circ}\text{C}$ | |
| LED psu: | > 50,000 h |
| LED module: | > 200,000 h (L 80 B 50) 100,000 h (L 90 B 50) |

| | |
|---|--|
| Ambient temperature $t_{a \max} = 55^{\circ}\text{C}$ (100 %) | |
| LED psu: | 50,000 h |
| LED module: | 145,000 h (L 80 B 50) 100,000 h (L 80 B 50) |

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.
 Recommended light point interval 4 m.

Article No. 84 604

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Accessories

Distribution box for installation in soil
70 730 Distribution box with 7 cable entries
 Connection terminals $5 \times 4^{\square}$
71 053 Distribution box with 10 cable entries
 Connection terminals $6 \times 16^{\square}$

See the separate instructions for use.

Light distribution

