
Sensor-switched outdoor light

**L 15** white EAN 4007841 617912 Article number 617912



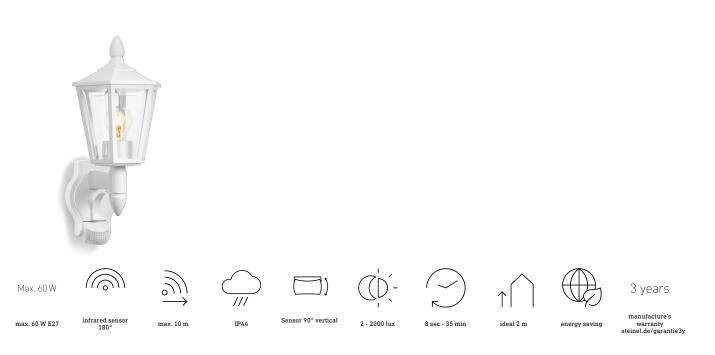

## **Function description**

The good old days. Classic outdoor SensorLight L 15, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone.

## **Technical specifications**


nsions (L x W x H)	240 x 190 x 410 mm	Twilight setting	2 – 2000 lx
s power supply	230 – 240 V / 50 Hz	Time setting	8 s – 35 Min.
Sensor Technology	passive infrared	Basic light level function	No
Dutput	60 W	Soft light start	No
Power consumption	0,55 W	Impact resistance	IK03
nterconnection	No	IP-rating	IP44
Slave modeselectable	No	Protection class	
With lamp	No	Ambient temperature	-20 - 40 °C
_amp	All-purpose lamp	Housing material	Plastic
Base	E27	Cover material	Plastic, transparent
Vith motion detector	Yes	Manufacturer's Warranty	3 years
Detection angle	180 °	Settings via	Potentiometers
Capability of masking out individual	Yes	With remote control	No
segments		Installation site	wall
Electronic scalability	No	Cover material	sticker
Mechanical scalability	No	Version	white
Reach, radial	r = 3 m (14 m <sup>2</sup> )	PU1, EAN	4007841617912
Reach, tangential	r = 10 m (157 m²)		
Photo-cell controller	Yes		

Sensor-switched outdoor light

**L 15** white EAN 4007841 617912 Article number 617912



## **Detection Zone**



Mögliche Montagehöhe: 1,80 m – 3,00 m Orange: radial Schwarz: tangential Dimension Drawing

