

BEGA**22 645**

Ceiling and wall luminaire



Project · Reference number

Date



Product data sheet

Application

Unshielded luminaire with protective guard and high protection class for installation under ceilings and on walls.

An extremely robust surrounding frame made of die cast aluminium protects the edges and corners of the crystal glass.

Product description

Luminaire made of aluminium alloy and stainless steel
 BEGA Unidure® coating technology
 Crystal glass, white inside
 Mounting plate with 2 fixing holes \varnothing 5,5 mm · 70 mm spacing
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10,5 mm
 Connecting terminal and earth conductor terminal 2.5[□]
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK06
 Protection against mechanical impacts < 1 joule
 – Safety mark
 – Conformity mark
 Weight: 2.6 kg

Lamp

Luminaire with screw base E 27
 Lamp output max. 75 W
 This product contains light source of energy efficiency class E


Supplied lamp
 BEGA LED lamp **13584**
 LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 43%

Additional BEGA LED lamps are available for this luminaire:

13586 LED 7 W · 805 lm · 3000 K
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

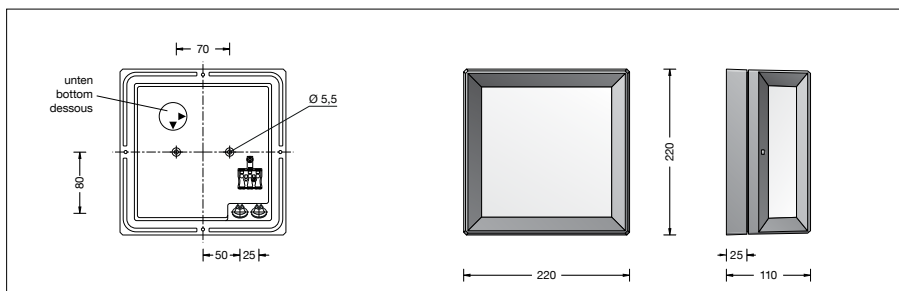

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	17,5 %
Luminous flux lower half-space	82,5 %

BUG rating according to IES TM-15-07:
 0-2-1

CEN Flux Code according to EN 13032-2:
 37-68-89-82-43-5-26-61-18

Article No. 22 645

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

