

BEGA**24 132**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded wall luminaire with high protection class.
A luminaire made of aluminium alloy and crystal glass.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
BEGA Unidure® coating technology
Crystal glass coated
2 mounting holes \varnothing 5 mm
Distance apart 125 mm
2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
BEGA Thermal Control®
Temporary thermal regulation to protect temperature-sensitive components without switching off the luminaire
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK04
Protection against mechanical impacts < 0.5 joule
 – Safety mark
 – Conformity mark
Weight: 1.8 kg
This product contains light sources of energy efficiency class(es) B, C

Inrush current

Inrush current: 5 A / 40 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B 10A: 50 luminaires
B 16A: 50 luminaires
C 10A: 80 luminaires
C 16A: 80 luminaires

Lamp



Module connected wattage 5.6 W
Luminaire connected wattage 6.6 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \max} = 55$ °C

24 132 K3

Module designation LED-0357/830
Colour temperature 3000 K
Colour rendering index CRI > 80
Module luminous flux 1165 lm
Luminaire luminous flux 575 lm
Luminaire luminous efficiency 87,1 lm/W

24 132 K4

Module designation LED-0357/840
Colour temperature 4000 K
Colour rendering index CRI > 80
Module luminous flux 1195 lm
Luminaire luminous flux 588 lm
Luminaire luminous efficiency 89,1 lm/W

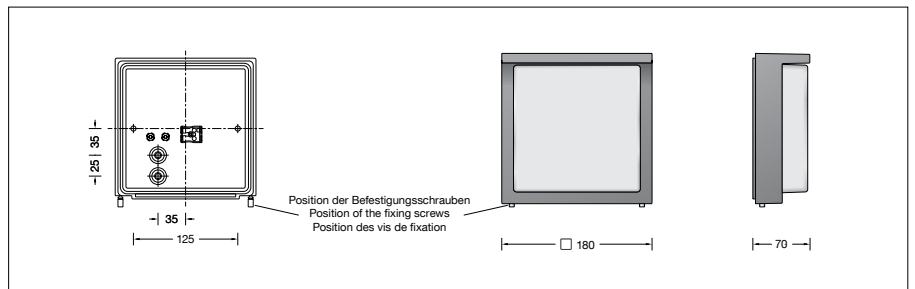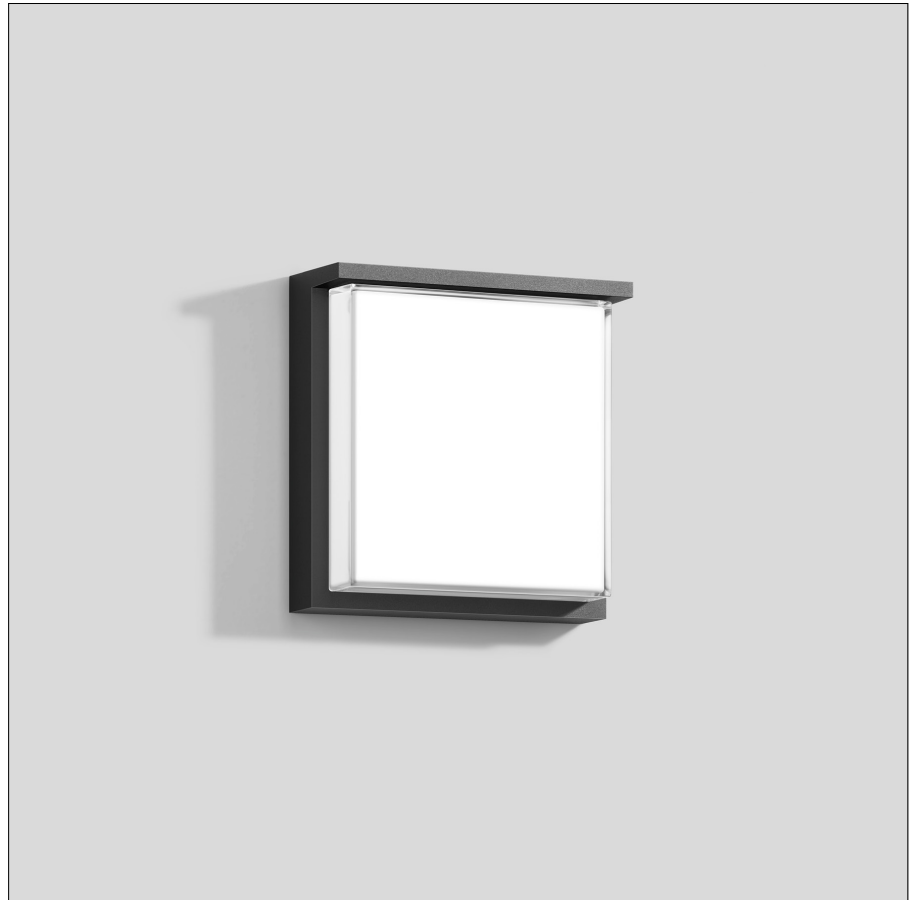

Service life · Ambient temperature

Rated temperature $t_a = 25$ °C
LED psu: > 50,000 h
LED module: > 200,000 h (L 80 B 50)
100,000 h (L 90 B 50)

Ambient temperature max. $t_a = 55$ °C (100 %)
LED psu: 50,000 h
LED module: > 200,000 h (L 80 B 50)
100,000 h (L 90 B 50)

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space 45,1 %
Luminous flux lower half-space 54,9 %

BUG rating according to IES TM-15-07:
0-3-1

CEN Flux Code according to EN 13032-2:
19-44-72-55-100-12-36-67-45

Article No. 24 132

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

