

BEGA**33 483**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded wall luminaire with high protection class for a variety of lighting tasks.
A luminaire made of aluminium alloy and crystal glass.
The luminaire can be installed in any burning position.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
BEGA Unidure® coating technology
Crystal glass, white inside
2 mounting holes \varnothing 4.5 mm
Distance apart 210 mm
2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
Lamp holder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK07
Protection against mechanical impacts < 2 joule
 – Safety mark
CE – Conformity mark
Weight: 2.8 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 60 W
This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13584**
LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 46%


Additional BEGA LED lamps are available for this luminaire:

- 13586** LED 7 W · 805 lm · 3000 K
dimmmable
- 13588** LED 8 W · 1055 lm · 3000 K
- 13590** LED 12 W · 1400 lm · 3000 K
- 13592** LED 12 W · 1400 lm · 3000 K
dimmmable

Radio-controlled version (Zigbee 3.0):

- 13555** LED 9 W · 805 lm · 2700 K
dimmmable
- 13556** LED 9 W · 805 lm · 2700-6500 K
dimmmable · tunable white
- 13557** LED 9.5 W · 805 lm · 2700-6500 K
dimmmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

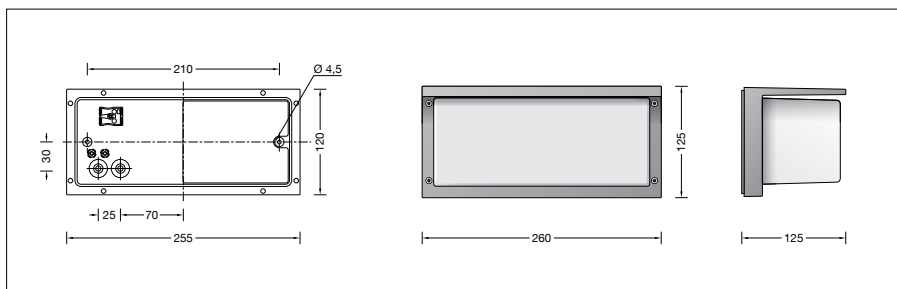

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	29,2 %
Luminous flux lower half-space	70,8 %

BUG rating according to IES TM-15-07:
0-2-1

CEN Flux Code according to EN 13032-2:
33-62-84-71-46-11-35-66-29

Article No. 33483

Colour graphite, silver or bronze
graphite – article number
silver – article number + **A**
bronze – article number + **B**