

BEGA**44 004**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire made of stainless steel and hand-blown opal glass.
A luminaire shielded to the top for a host of lighting applications in interior and exterior design.

Product description

Luminaire back housing made of aluminium alloy
Surround made of stainless steel
Steel grade no. 1.4301
Opal glass
2 mounting holes \varnothing 5 mm
Distance apart 70 mm
1 cable entry for mains supply cable up to \varnothing 10,5 mm
Lamp holder terminal 2.5[□]
Earth conductor connection
Lamp holder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies \geq 1 mm and splash water
Impact strength IK03
Protection against mechanical impacts $<$ 0.35 joule
 – Safety mark
CE – Conformity mark
Weight: 2.4 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 75 W
This product contains light source of energy efficiency class E


Supplied lamp
BEGA LED lamp **13588**
LED Retrofit 8 W · 1055 lm · 3000 K

Luminaire efficiency: 57%

Additional BEGA LED lamps are available for this luminaire:

13584 LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K
dimmmable
13590 LED 12 W · 1400 lm · 3000 K
13592 LED 12 W · 1400 lm · 3000 K
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

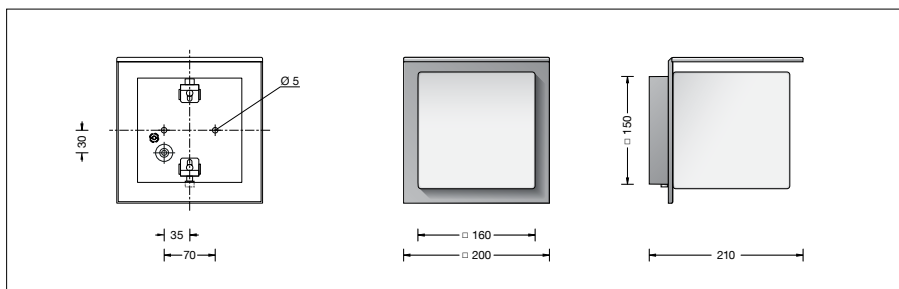

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space 33,2 %
Luminous flux lower half-space 66,8 %

BUG rating according to IES TM-15-07:
0-3-1
CEN Flux Code according to EN 13032-2:
28-56-80-67-57-10-33-64-33

Light distribution

