

**BEGA****33 112**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

## Product data sheet

### Application

Unshielded luminaire made of stainless steel for installation under ceilings, on walls as well as on pillars and murals.

By means of the three-ply opal glass the light is distributed softly and uniformly over the glass surface.

### Product description

Luminaire made of stainless steel

Steel grade no. 1.4401

Opal glass with screw neck

Mounting plate with 2 fixing

holes  $\varnothing$  5.5 mm · 70 mm spacing

2 cable entries for through-wiring of mains

supply cable  $\varnothing$  7-10.5 mm

Connecting terminal 2.5<sup>□</sup>

with plug connection

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 64

Dust-tight and protection against splash water

Impact strength IK06

Protection against mechanical

impacts < 1 joule

– Safety mark

**CE** – Conformity mark

Weight: 0.85 kg

### Lamp

Luminaire with screw base E 27

Lamp output max. 60 W

This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13584**


LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 73%

Additional BEGA LED lamps are available for this luminaire:

**13586** LED 7 W · 805 lm · 3000 K  
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

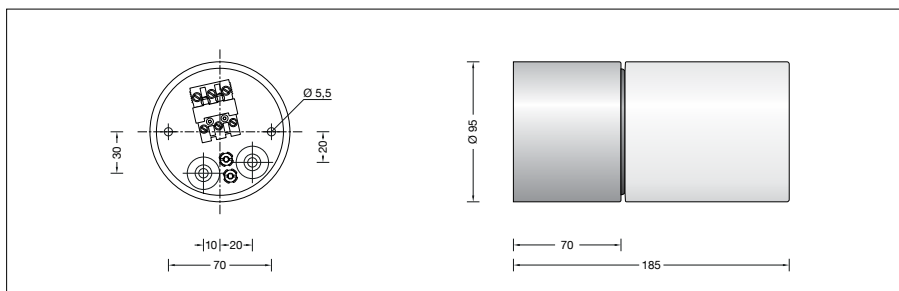

### Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

### Ratio of luminous flux

Luminous flux upper half-space	38,6 %
Luminous flux lower half-space	61,4 %

BUG rating according to IES TM-15-07:  
0-3-1

CEN Flux Code according to EN 13032-2:  
26-53-78-61-73-13-37-67-39

### Light distribution

