

BEGA**44 568**

Ceiling · Wall · Pillar luminaire



Project · Reference number



Date

Product data sheet

Application

Unshielded luminaire for installation under ceilings, on walls as well as on pillars and murals. By means of the three-ply opal glass the light is distributed softly and uniformly over the glass surface.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 BEGA Unidure® coating technology
 Opal glass with screw neck
 2 mounting holes \varnothing 4.5 mm
 Distance apart 50 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Connection terminal 2.5²
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK02
 Protection against mechanical impacts < 0.2 joule
 – Safety mark
 – Conformity mark
 Weight: 1.4 kg

Lamp

Luminaire with screw base E 27
 Lamp output max. 60 W
 This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13 584**
 LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 86%

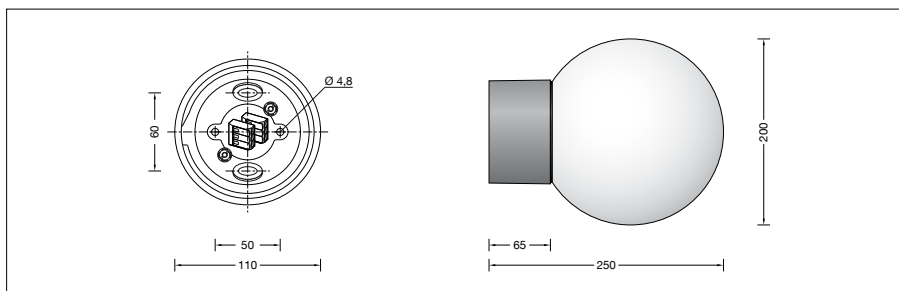
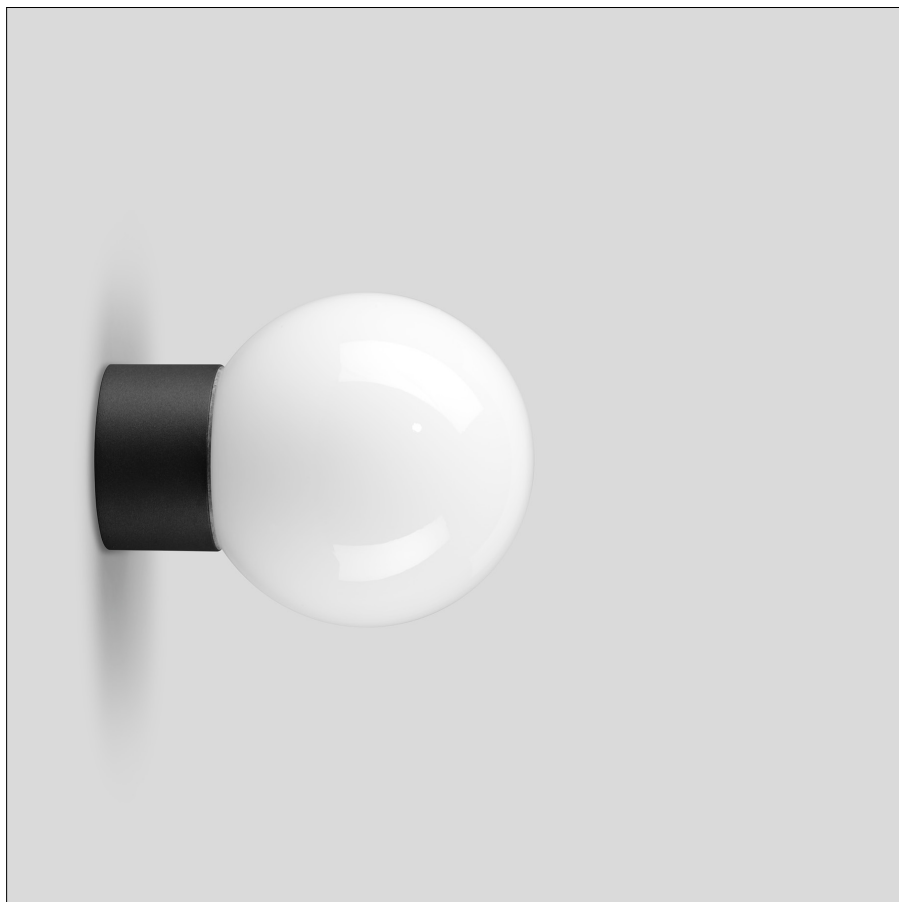
Additional BEGA LED lamps are available for this luminaire:

- 13 586** LED 7 W · 805 lm · 3000 K
dimmmable
- 13 588** LED 8 W · 1055 lm · 3000 K
- 13 590** LED 12 W · 1400 lm · 3000 K
- 13 592** LED 12 W · 1400 lm · 3000 K
dimmmable

Radio-controlled version (Zigbee 3.0):

- 13 555** LED 9 W · 805 lm · 2700 K
dimmmable
- 13 556** LED 9 W · 805 lm · 2700-6500 K
dimmmable · tunable white
- 13 557** LED 9.5 W · 805 lm · 2700-6500 K
dimmmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.