

BEGA**33 047**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded wall luminaire made of aluminium alloy and hand-blown three-ply opal glass.
A luminaire with uniform light distribution for a variety of lighting tasks in interior and exterior lighting applications.

Product description

Luminaire made of aluminium alloy and stainless steel
BEGA Unidure® coating technology
Opal glass with sliding bolt glass closure
2 mounting holes \varnothing 4,5 mm
Distance apart 100 mm
1 cable entry for mains supply cable up to \varnothing 10,5 mm
Lampholder terminal 2.5[□]
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies \geq 1 mm and splash water
Impact strength IK06
Protection against mechanical impacts < 1 joule
 – Safety mark
CE – Conformity mark
Weight: 1.6 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 60 W
This product contains light source of energy efficiency class E

Supplied lamp
BEGA LED lamp **13584**
LED Retrofit 7 W · 805 lm · 3000 K



Luminaire efficiency: 22%

Additional BEGA LED lamps are available for this luminaire:

13586 LED 7 W · 805 lm · 3000 K
dimmable

13588 LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

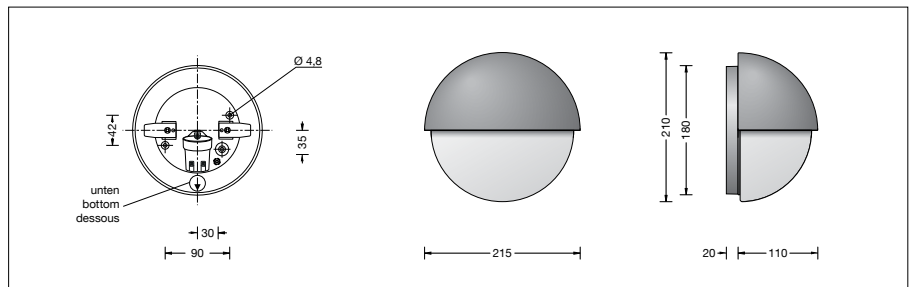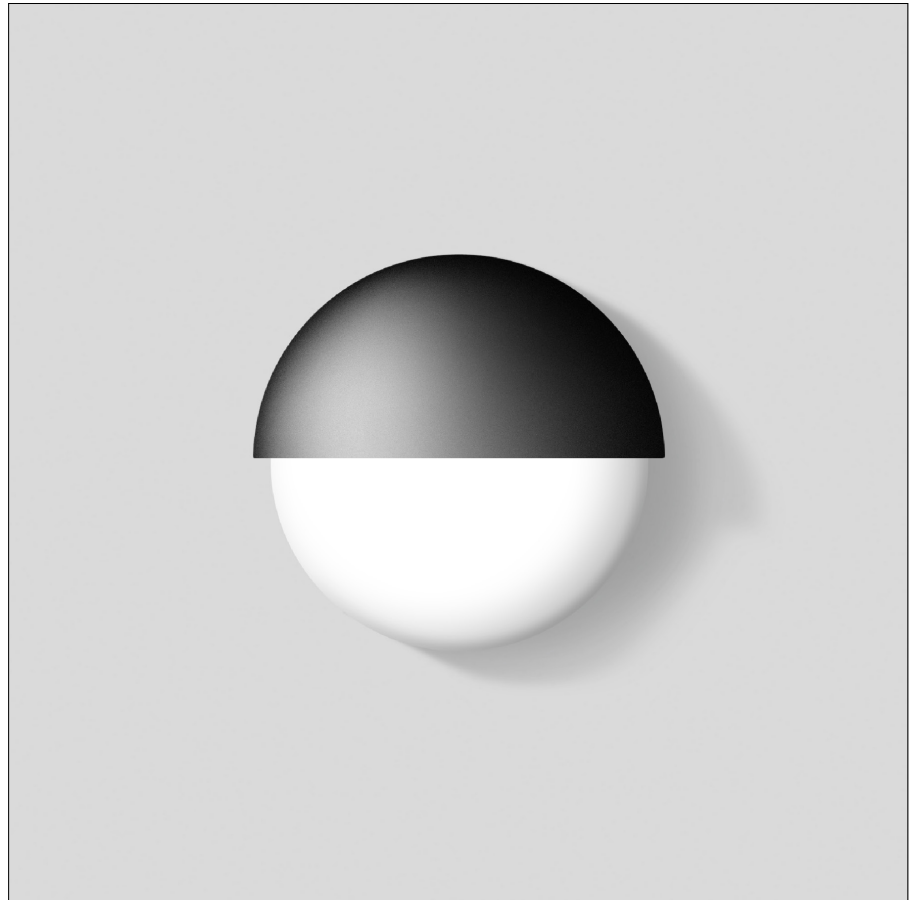

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	24 %
Luminous flux lower half-space	76 %

BUG rating according to IES TM-15-07:
0–2–0

CEN Flux Code according to EN 13032-2:
29–56–80–76–22–3–19–51–24

Article No. 33 047

Colour optionally graphite or white
Graphite – Article number
White – Article number + **W**

Light distribution

