

**BEGA****31 495**

Ceiling and wall luminaire



Project · Reference number


Date

## Product data sheet

### Application

Free-radiating ceiling and wall luminaire for many lighting tasks in or on buildings.  
Luminaire made of copper and thick-walled crystal glass.

### Product description

Luminaire made of copper,  
brass and stainless steel  
Crystal glass coated  
Reflector made of pure anodised aluminium  
2 mounting holes  $\varnothing$  4.5 mm  
Distance apart 97 mm  
1 cable entry for mains supply cable  
up to  $\varnothing$  10,5 mm  
Lamp holder terminal 2.5<sup>□</sup>  
Earth conductor connection  
Lamp holder E 27  
Safety class I  
Protection class IP 64  
Dust-tight and protection against splash water  
Impact strength IK07  
Protection against mechanical  
impacts < 2 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 2.2 kg

### Lamp

Luminaire with screw base E 27  
Lamp output max. 60 W  
This product contains light source of energy  
efficiency class E

Supplied lamp


BEGA LED lamp **13584**  
LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 48%

Additional BEGA LED lamps are available for  
this luminaire:

- 13586** LED 7 W · 805 lm · 3000 K  
dimmable
- 13588** LED 8 W · 1055 lm · 3000 K
- 13590** LED 12 W · 1400 lm · 3000 K
- 13592** LED 12 W · 1400 lm · 3000 K  
dimmable

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

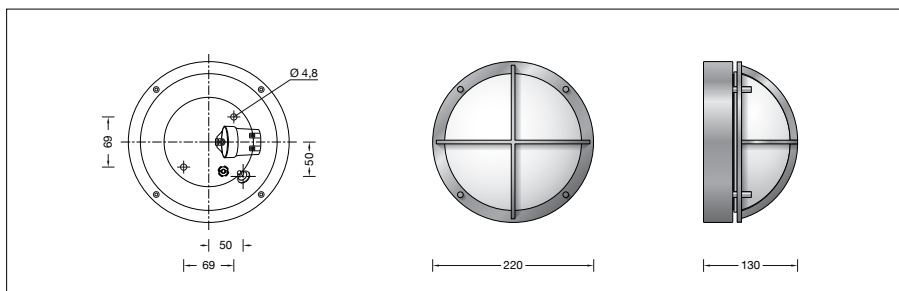

### Lighting technology

Luminaire data for the DIALux lighting design  
program for outdoor lighting, street lighting  
and indoor lighting, as well as luminaire data in  
EULUMDAT and IES format are available on the  
BEGA website at [www.bega.com](http://www.bega.com).

### Copper

The luminaire parts made of solid copper are  
delivered with the metal's natural surface colour.  
Time and weather factors create the natural  
patina characteristic for copper.