

BEGA**24 471**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with shielded light source.
A luminaire of high protection class and single-sided, downwards directed light sector.
For a variety of lighting tasks in interior and exterior lighting applications.

Dark Sky

For installation with light emission downwards, the light from this luminaire is directed evenly and highly efficiently onto the surface to be illuminated. No light is emitted at all into the upper half-space of the luminaire.

Product description

Luminaire made of aluminium alloy and stainless steel
BEGA Unidure® coating technology
Colour graphite, silver or white
Safety glass, white
Silicone gasket
2 elongated fixing holes
Width 4,5 mm · 177 mm spacing
2 cable entries for through-wiring of mains supply cable \varnothing 7-10,5 mm
Connection terminal 2.5²
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
BEGA Thermal Switch®
Temporary thermal shutdown to protect temperature-sensitive components
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK06
Protection against mechanical impacts < 1 joule
 – Safety mark
 – Conformity mark
Weight: 1.1 kg
This product contains light sources of energy efficiency class(es) D

Inrush current

Inrush current: 6.8 A / 133 μ s
Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 93 luminaires
B 16A: 150 luminaires
C 10A: 156 luminaires
C 16A: 250 luminaires

Lamp



Module connected wattage	3.8 W
Luminaire connected wattage	5 W
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a\text{max}} = 55^\circ\text{C}$

24 471 K3

Module designation	LED-0424/930
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	630 lm
Luminaire luminous flux	230 lm
Luminaire luminous efficiency	46 lm/W

24 471 K4

Module designation	LED-0424/940
Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	665 lm
Luminaire luminous flux	243 lm
Luminaire luminous efficiency	48,6 lm/W

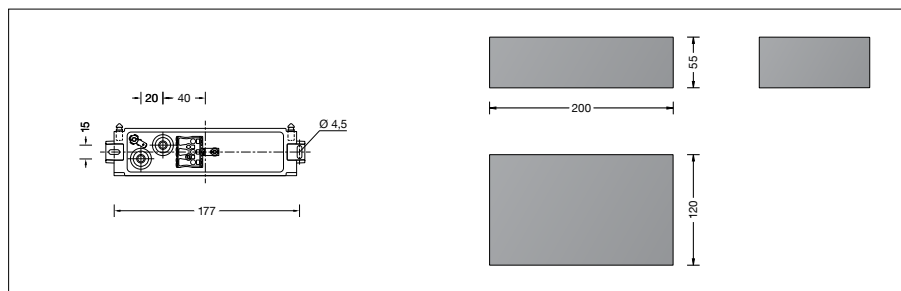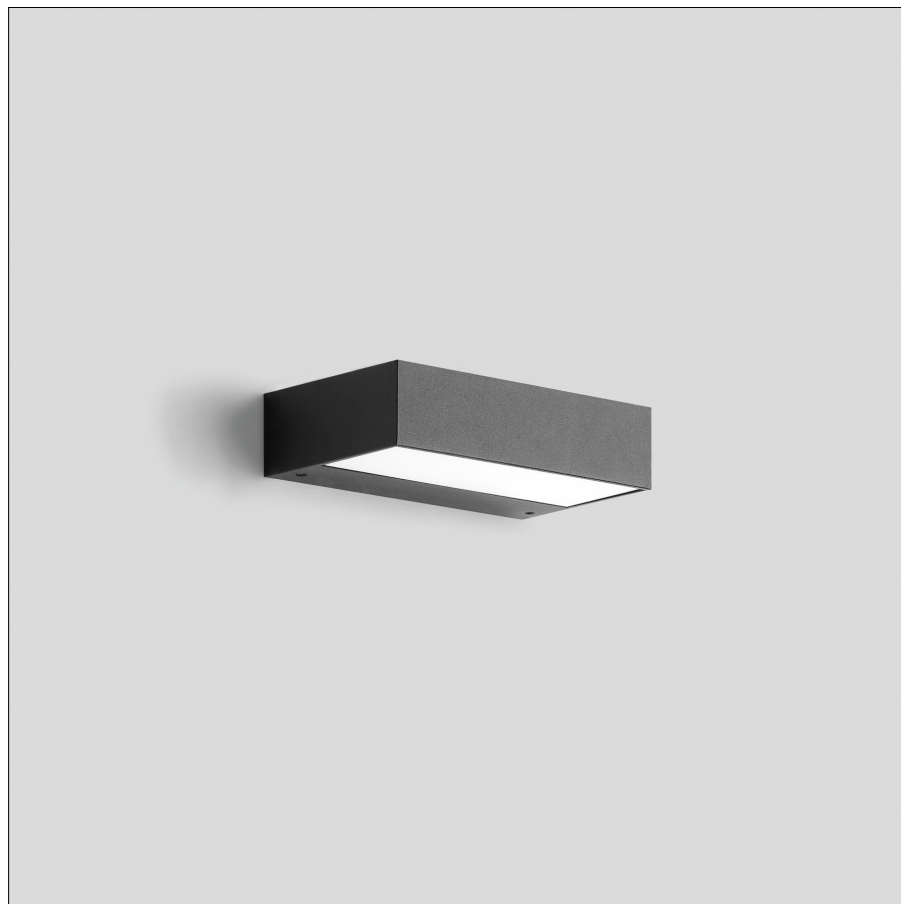

Service life · Ambient temperature

Rated temperature $t_a = 25^\circ\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L 80 B 50) 100,000 h (L 90 B 50)

Ambient temperature max. $t_a = 55^\circ\text{C}$ (100 %)

LED psu:	50,000 h
LED module:	> 200,000 h (L 80 B 50) 100,000 h (L 90 B 50)

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	0 %
Luminous flux lower half-space	100 %

BUG rating according to IES TM-15-07:
0-0-0

CEN Flux Code according to EN 13032-2:
47-79-96-100-100

Article No. 24 471

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Colour optionally graphite, white or silver
Graphite – Article number
White – Article number + **W**
Silver – Article number + **A**