

BEGA**33 590**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with two-sided light output.
For illumination and design tasks in architecture.
The light directed downwards is intended to illuminate the wall and the horizontal surface in front of it.

The light directed upwards is intended to illuminate the wall and ceiling surfaces.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
BEGA Unidure® coating technology
Clear safety glass
Silicone gasket
Reflector made of pure anodised aluminium
2 mounting holes \varnothing 4,3 mm
Distance apart 50 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10,5 mm
Connecting terminal 2.5²
with plug connection
Earth conductor connection
BEGA Ultimate Driver®
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
BEGA Thermal Switch®
Temporary thermal shutdown to protect
temperature-sensitive components
Safety class I
Protection class IP 64
Dust-tight and protection against splash water
Impact strength IK03
Protection against mechanical
impacts < 0.35 joule
 – Safety mark
 – Conformity mark
Weight: 0.7 kg

Lamp

Module connected wattage	3.8 W
Luminaire connected wattage	4.9 W
Rated temperature	$t_a = 25\text{ }^\circ\text{C}$
Ambient temperature	$t_{a\text{ max}} = 40\text{ }^\circ\text{C}$


On request we can offer you modifications for environments with higher temperatures as a customized product.

33 590 K3

Module designation	2x LED-0684/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	590 lm
Luminaire luminous flux	293 lm
Luminaire luminous efficiency	59,8 lm/W

33 590 K4

Module designation	2x LED-0684/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	620 lm
Luminaire luminous flux	308 lm
Luminaire luminous efficiency	62,9 lm/W

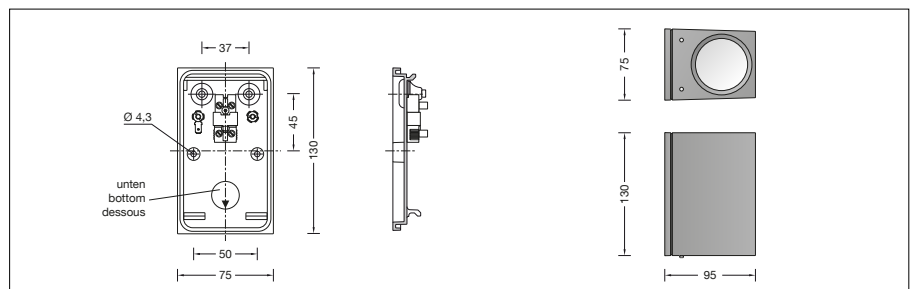

Service life · Ambient temperature

Rated temperature $t_a = 25\text{ }^\circ\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L80B50) 100,000 h (L90B50)

Ambient temperature $t_{a\text{ max}} = 40\text{ }^\circ\text{C}$ (100 %)	
LED psu:	50,000 h
LED module:	> 200,000 h (L80B50)

Lighting technology

Half beam angle 23°
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

Inrush current

Inrush current: 7 A / 112 μs
Maximum number of luminaires of this type per miniature circuit breaker:
B 10 A: 38 luminaires
B 16 A: 61 luminaires
C 10 A: 64 luminaires
C 16 A: 102 luminaires

Article No. 33 590

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Colour optionally graphite, white or silver
Graphite – Article number
White – Article number + **W**
Silver – Article number + **A**

Light distribution

