

**BEGA****66 491**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire with shielded light source and opal glass.

A luminaire shielded to the top for a host of lighting applications.

### Product description

Luminaire made of aluminium alloy, aluminium and stainless steel  
 BEGA Unidure® coating technology  
 Opal glass with screw neck  
 2 mounting holes  $\varnothing$  5.2 mm  
 Distance apart 70 mm

1 cable entry for mains supply cable up to  $\varnothing$  10,5 mm

Connecting terminal 2.5<sup>□</sup>

with plug connection

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies  $\geq$  1 mm and splash water

Impact strength IK05

Protection against mechanical impacts  $<$  0.7 joule

Impact strength IK05

Protection against mechanical impacts  $<$  0.7 joule

– Safety mark

**CE** – Conformity mark

Weight: 2.2 kg

### Lamp

Luminaire with screw base E 27

Lamp output max. 60 W

This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13590**

LED Retrofit 12 W · 1400 lm · 3000 K

Luminaire efficiency: 58%

Additional BEGA LED lamps are available for this luminaire:


**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
 dimmable

**13588** LED 8 W · 1055 lm · 3000 K

**13592** LED 12 W · 1400 lm · 3000 K  
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

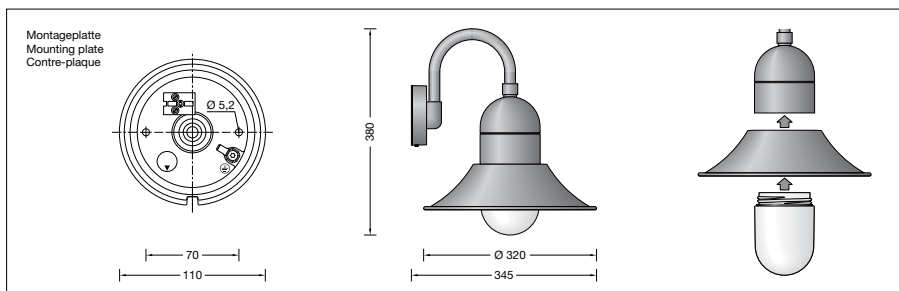

### Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

### Accessory

**10409** Corner block  
 Corner block for installation of wall lights on a house corner.

A separate instructions for use can be provided upon request.