

BEGA**31 035**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with shielded light source and opal glass.

A luminaire shielded to the top for a host of lighting applications.

Product description

Luminaire made of aluminium alloy and stainless steel

BEGA Unidure® coating technology

Opal glass

Silicone gasket

Mounting plate with 2 fixing

holes \varnothing 4,5 mm · 40 mm spacing

1 cable entry for mains supply cable

up to \varnothing 10,5 mm

Connection terminal 2.5²

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies

\geq 1 mm and splash water

Impact strength IK06

Protection against mechanical

impacts < 1 joule

– Safety mark

– Conformity mark

Weight: 1.4 kg

Lamp

Luminaire with screw base E 27

Lamp output max. 60 W

This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13584**

LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 32%

Additional BEGA LED lamps are available for this luminaire:


13586 LED 7 W · 805 lm · 3000 K
dimnable

13588 LED 8 W · 1055 lm · 3000 K

13590 LED 12 W · 1400 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

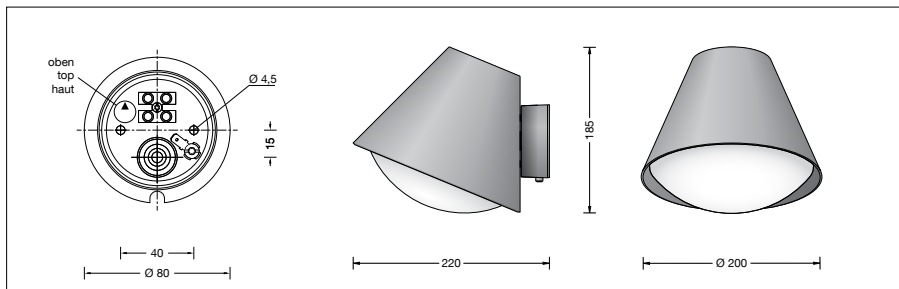

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Article No. 31 035

Colour graphite or bronze
graphite – article number
bronze – article number + **B**