

BEGA**31 415**

Wall luminaire »Brügge«



Project · Reference number

Date

Product data sheet

Application

Wall luminaire for many lighting tasks on or in buildings.

The hand-blown crystal bubble glass of this luminaire is distinguished by the very lively surface.

Thus the light is distributed in many directions.

Product description

Luminaire made of aluminium alloy and stainless steel

BEGA Unidure® coating technology

Crystal bubble glass

2 mounting holes \varnothing 5.2 mm

Distance apart 70 mm

1 cable entry for mains supply cable

up to \varnothing 10,5 mm

Connecting terminal 2.5[□]

with plug connection

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies

\geq 1 mm and splash water

Impact strength IK02

Protection against mechanical

impacts < 0.2 joule

– Safety mark

– Conformity mark

Weight: 3.4 kg

Lamp

Luminaire with screw base E 27

Lamp output max. 100 W

This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13584**


LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 59%

Additional BEGA LED lamps are available for this luminaire:

13586 LED 7 W · 805 lm · 3000 K
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

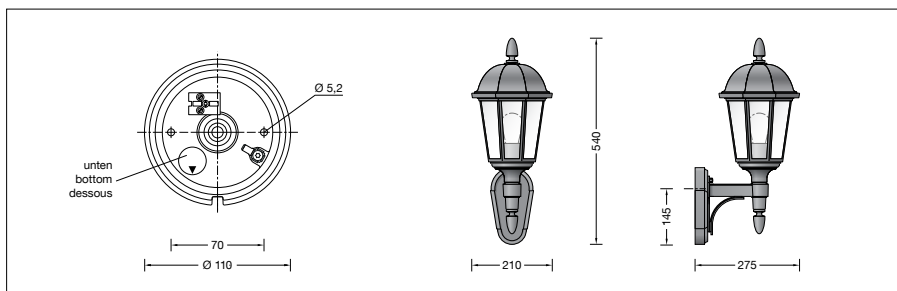

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.