BEGA

Wall luminaire

Project · Reference number

Product data sheet

Application

Wall luminaire with directed light. A shield made of aluminium screens the light of the luminaire upwards and forwards and directs it onto the surface to be illuminated. A small light aperture on the back illuminates additionally the luminaire shape. The luminaire can be installed with the light distribution opening directed upwards or downwards.

Dark Sky

The light from this luminaire is directed evenly and highly efficiently onto the surface to be illuminated. Less than 1 % of the luminaire luminous flux is emitted into the upper halfspace of the luminaire.

Product description

Luminaire made of aluminium and stainless steel BEGA Unidure® coating technology Crystal bubble glass with screw neck Silicone gasket 2 mounting holes ø 4.5 mm Distance apart 76mm 1 cable entry for mains supply cable up to ø 10,5 mm Lampholder terminal 2.5^D Earth conductor connection Lampholder E 14 Safety class I Protection class IP 64 Dust-tight and protection against splash water Impact strength IK02 Protection against mechanical impacts < 0.2 joule 🛣 10 💩 – Safety mark CE – Conformity mark Weight: 0.95 kg

Lamp

Luminaire with screw base E 14 Lamp output max. 40 W This product contains light source of energy efficiency class E


Supplied lamp BEGA LED lamp 13594 LED Retrofit 4 W · 470 lm · 3000 K

Luminaire efficiency: 13%

Additional BEGA LED lamps are available for this luminaire:

13 593 LED 4 W · 470 lm · 3000 K Bulb design: clear

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

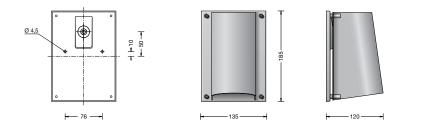

Ratio of luminous flux

Luminous flux upper half-space Luminous flux lower half-space


0,7 % 99.3 %

BUG rating according to IES TM-15-07: 0 - 1 - 0CEN Flux Code according to EN 13032-2:

86-97-100-99-13-70-79-88-1

Article No. 31 196

Colour graphite or bronze graphite - article number bronze - article number + B Date

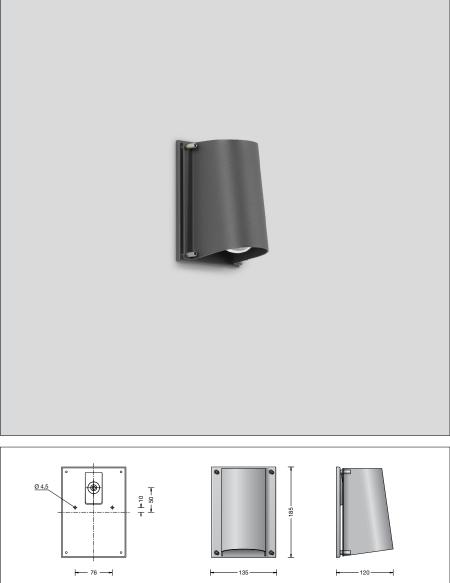

₹₹10 ▲ IP 64