

**BEGA****33 034**

Lichtbaustein®



Project · Reference number

Date

## Product data sheet

### Application

**Lichtbaustein®** Square  
Ceiling and wall luminaire for many lighting tasks.  
Ideal for places where a soft and uniform  
lighting distribution is required.

### Product description

Luminaire made of aluminium alloy,  
aluminium and stainless steel  
BEGA Unidure® coating technology  
Colour graphite or silver  
Opal glass satin matt  
Reflector made of pure anodised aluminium  
2 mounting holes  $\varnothing$  5.5 mm  
Distance apart 130 mm  
2 cable entries for through-wiring of mains  
supply cable  $\varnothing$  7-10.5 mm  
Connection terminal 2.5<sup>2</sup>  
Earth conductor connection  
Lamp holder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
 $\geq$  1 mm and splash water  
Impact strength IK02  
Protection against mechanical  
impacts < 0.2 joule  
 – Safety mark  
 – Conformity mark  
Weight: 1.5 kg

### Lighting technology

Luminaire data for the DIALux lighting design  
program for outdoor lighting, street lighting  
and indoor lighting, as well as luminaire data in  
EULUMDAT and IES format are available on the  
BEGA website at [www.bega.com](http://www.bega.com).

### Lamp

Luminaire with screw base E 27  
Lamp output max. 75 W  
This product contains light source of energy  
efficiency class C



Supplied lamp  
BEGA LED lamp **13584**  
LED Retrofit 4.8 W · 805 lm · 3000 K

Luminaire efficiency: 47%

Additional BEGA LED lamps are available for  
this luminaire:

**13586** LED 4.8 W · 805 lm · 3000 K  
dimmmable

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

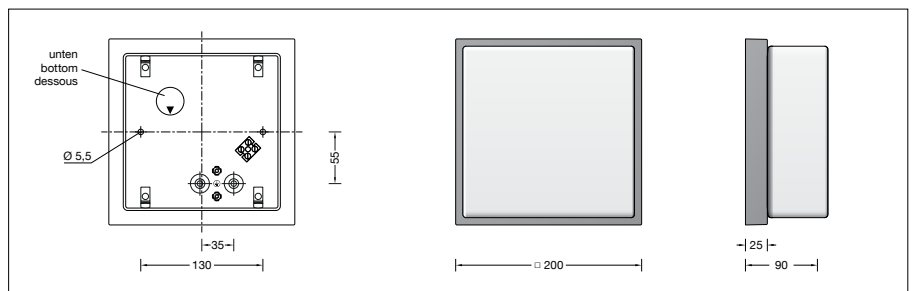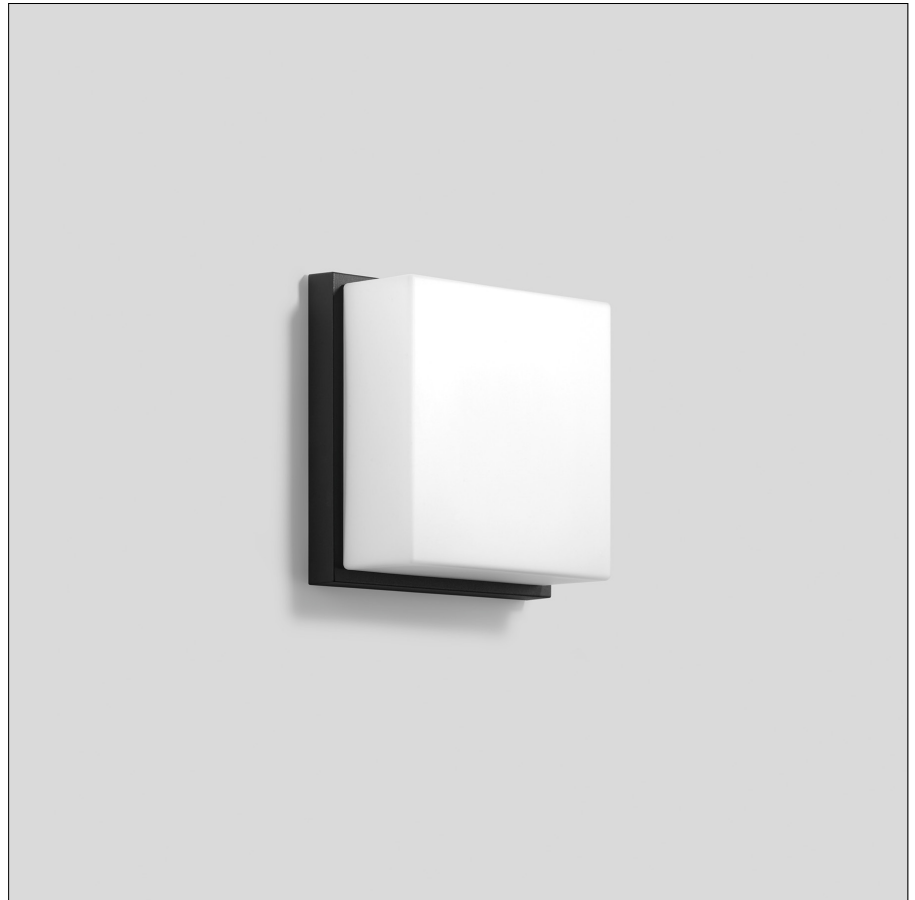

### Ratio of luminous flux

Luminous flux upper half-space 20,8 %  
Luminous flux lower half-space 79,2 %

### Article No. 33 034

Colour graphite or silver  
graphite – article number  
silver – article number + **A**

BUG rating according to IES TM-15-07:

0-2-1

CEN Flux Code according to EN 13032-2:

37-66-87-79-47-10-33-64-21

### Light distribution

