

BEGA**33 185**

Lichtbaustein®



Project · Reference number

Date

Product data sheet

Application

Lichtbaustein®

Ceiling and wall luminaire for many lighting tasks.
Ideal for places where a soft and uniform lighting distribution is required.
For interior and exterior applications.

Product description

Luminaire made of aluminium alloy and stainless steel
BEGA Unidure® coating technology
Colour graphite
Opal glass
2 mounting holes \varnothing 5 mm
Distance apart 160 mm
2 cable entries for through-wiring of mains supply cable \varnothing 7-10,5 mm
Lamp holder terminal 2.5[□]
Earth conductor connection
Lamp holder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies \geq 1 mm and splash water
Impact strength IK02
Protection against mechanical impacts < 0.2 joule
 – Safety mark
 – Conformity mark
Weight: 0.9 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 40 W
This product contains light source of energy efficiency class C



Supplied lamp
BEGA LED lamp **13584**
LED Retrofit 4.8 W · 805 lm · 3000 K

Luminaire efficiency: 55%

Additional BEGA LED lamps are available for this luminaire:

13586 LED 4.8 W · 805 lm · 3000 K
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

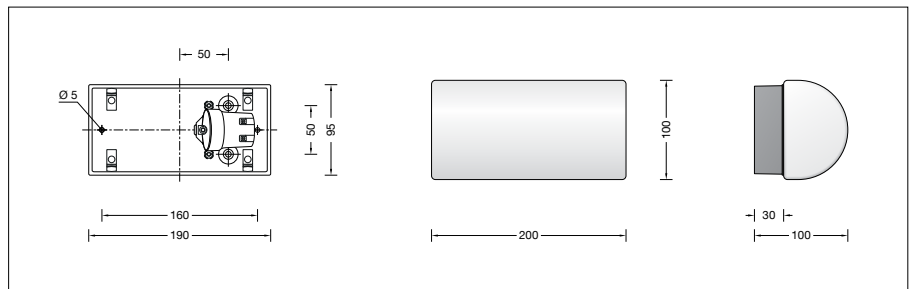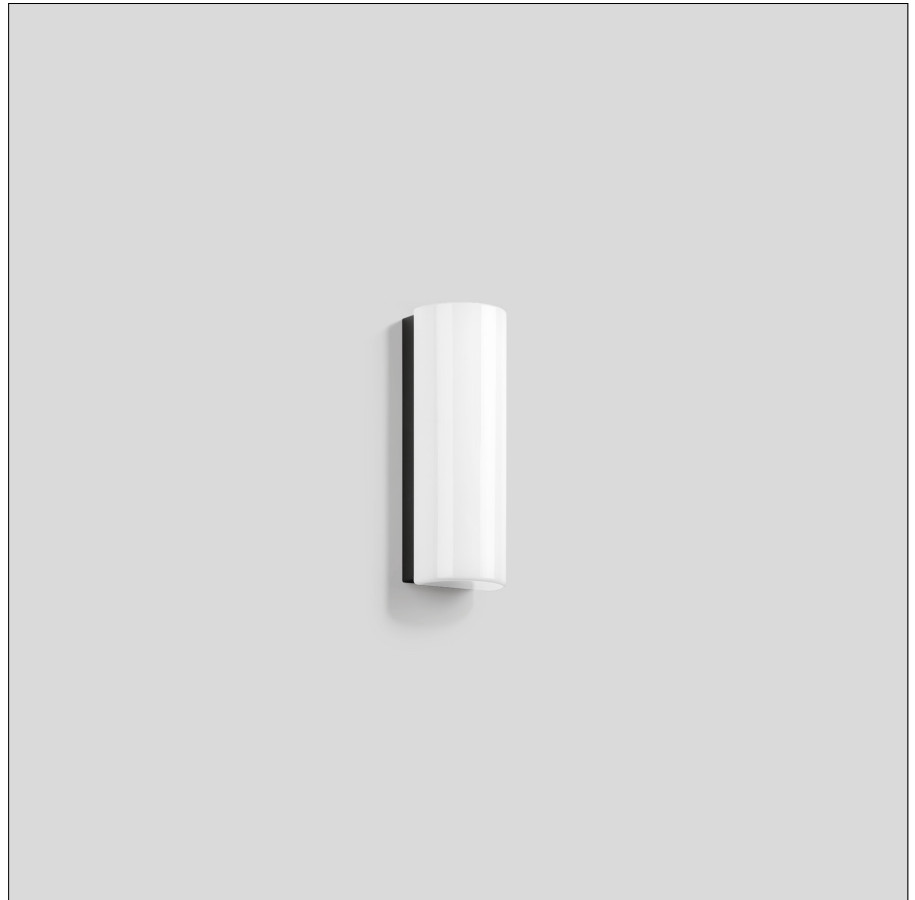

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Ratio of luminous flux

Luminous flux upper half-space	30,7 %
Luminous flux lower half-space	69,3 %

BUG rating according to IES TM-15-07:

0-2-0

CEN Flux Code according to EN 13032-2:

31-58-81-69-55-13-35-65-31

Light distribution

