

**BEGA****33 766**

Lichtbaustein®



Project · Reference number

Date

## Product data sheet

### Application

**Lichtbaustein®** Rectangle  
Ceiling and wall luminaire for many lighting tasks.  
Ideal for places where a soft and uniform  
lighting distribution is required.  
For interior and exterior applications.

### Product description

Luminaire made of aluminium alloy  
and stainless steel  
BEGA Unidure® coating technology  
Opal glass satin matt  
2 mounting holes  $\varnothing$  5 mm  
Distance apart 255 mm  
1 cable entry for mains supply cable  
up to  $\varnothing$  10,5 mm  
Connection terminal 2.5<sup>□</sup>  
Earth conductor connection  
Lamp holder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
 $\geq$  1 mm and splash water  
Impact strength IK04  
Protection against mechanical  
impacts < 0.5 joule  
 – Safety mark  
 – Conformity mark  
Weight: 1.3 kg

### Lamps

Luminaire with screw base E 27  
Lamp output max. 2 × 40 W  
This product contains light sources of energy  
efficiency class E



Supplied lamp  
2 × BEGA LED lamp **13 584**  
LED Retrofit 7 W · 1610 lm · 3000 K

Luminaire efficiency: 66%

Additional BEGA LED lamps are available for  
this luminaire:

**13 586** LED 7 W · 805 lm · 3000 K  
dimmable

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

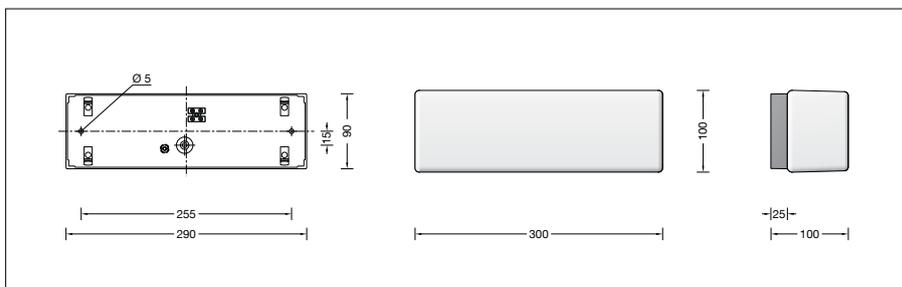

### Lighting technology

Luminaire data for the DIALux lighting design  
program for outdoor lighting, street lighting  
and indoor lighting, as well as luminaire data in  
EULUMDAT and IES format are available on the  
BEGA website at [www.bega.com](http://www.bega.com).

### Ratio of luminous flux

Luminous flux upper half-space	29,1 %
Luminous flux lower half-space	70,9 %

BUG rating according to IES TM-15-07:  
0-3-1  
CEN Flux Code according to EN 13032-2:  
32-61-83-71-67-13-37-67-29

### Light distribution

