BEGA 84 074

Garden luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded garden luminaire made of copper with hand-blown crystal bubble glass.

The light will be fully screened by the top reflector and directed downwards with a broad spread light distribution.

For an effective illumination of paths, seats and beds in gardens.

Dark Sky

The light of this luminaire is directed evenly and highly efficiently onto the surface to be illuminated. Less than 1 % of the luminaire luminous flux is emitted into the upper half-space of the luminaire.

Product description

Luminaire made of copper and stainless steel Baseplate made of cast bronze Crystal bubble glass with screw neck Silicone gasket

Luminaire with mounting plate for bolting onto a foundation or an anchorage unit Mounting plate with 3 fixing holes \emptyset 8.5 mm · Pitch circle \emptyset 100 mm Mounting bracket with connection box and 3-pole terminal 4° for connection of mains supply cable max. $3 \times 2.5^{\circ}$ Lampholder E 27 Safety class I Protection class IP 64

Dust-tight and protection against splash water **€** - Safety mark **€** - Conformity mark Weight: 7.8 kg

Lamp

Luminaire with screw base E 27 Lamp output max. 60 W This product contains light source of energy efficiency class E

Supplied lamp BEGA LED lamp **13584** LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 44%

Additional BEGA LED lamps are available for this luminaire:

13 586 LED 7 W · 805 lm · 3000 K dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.


Ratio of luminous flux

44-79-96-100-44

 $\begin{array}{lll} \mbox{Luminous flux upper half-space} & \mbox{0,5 \%} \\ \mbox{Luminous flux lower half-space} & \mbox{99,5 \%} \end{array}$

BUG rating according to IES TM-15-07: 0-1-0 CEN Flux Code according to EN13032-2:



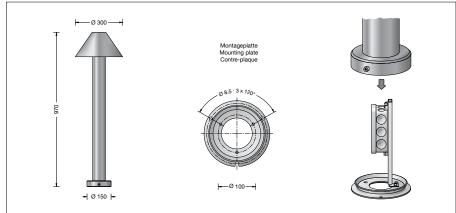

Bronze

The luminaire is made of massive cast bronze and delivered with the metal's natural surface. Time and weather factors create the natural patina characteristic for bronze.

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.

Accessory

70 895 Anchorage unit with mounting flange made of hot-dip galvanised steel. Total length 400 mm. 3 stainless steel fixing screws M8. Pitch circle Ø 100 mm.

See the separate instructions for use.