

BEGA**84 325**

Garden and pathway luminaire



Project · Reference number

Date

Product data sheet

Product description

Luminaire made of cast aluminium,
aluminium and stainless steel
BEGA Unidure® coating technology
Colour graphite or silver
Opal glass with screw neck
Silicone gasket
Luminaire with anchorage unit for fixing in
the soil
The anchorage unit is made of galvanised steel
according to EN ISO 1461
Mounting bracket with connection box and
3-pole terminal 4² for connection of
mains supply cable max. 3 G 2.5²
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK09
Protection against mechanical
impacts < 10 joule
 – Safety mark
 – Conformity mark
 Weight: 8.2 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 60 W
This product contains light source of energy
efficiency class E

Supplied lamp

BEGA LED lamp **13588**

LED Retrofit 6.5 W · 1055 lm · 3000 K

Luminaire efficiency: 23%

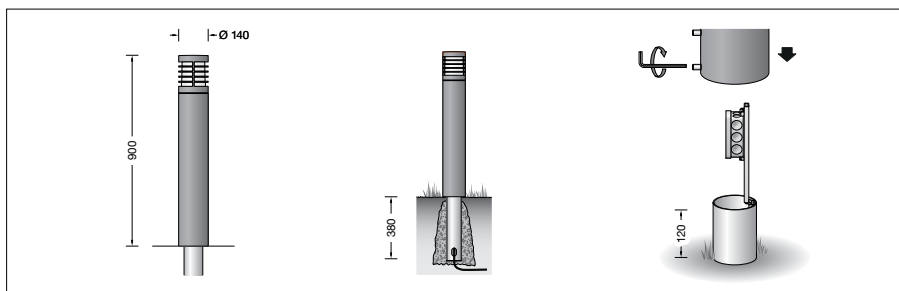
Additional BEGA LED lamps are available for
this luminaire:

13510 LED 7 W · 805 lm · 2700 K**13548** LED 7 W · 805 lm · 2700 K
dimnable**13584** LED 7 W · 805 lm · 3000 K**13586** LED 7 W · 805 lm · 3000 K
dimnable**13512** LED 8 W · 1055 lm · 2700 K

Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimnable**13556** LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white**13557** LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

**Application**

Unshielded garden and path luminaire with
safety guard. Light exit 360°.
With hand-blown, three-ply opal glass and
pleasantly uniform light effect for effective
illumination in private gardens.

Article No. 84 325

Colour graphite or silver
graphite – article number
silver – article number + **A**

Ratio of luminous flux

Luminous flux upper half-space 50,9 %
Luminous flux lower half-space 49,1 %

BUG rating according to IES TM-15-07:

0-2-1

CEN Flux Code according to EN 13032-2:

1-16-51-49-23-1-17-52-51

Light distribution