

**BEGA****22 633**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

## Product data sheet

### Application

Ceiling, wall and pillar luminaire with safety guard.  
A luminaire made of aluminium alloy and impact resistant crystal glass with light diffusing structures.

### Product description

Luminaire made of aluminium alloy and stainless steel  
BEGA Unidure® coating technology  
Crystal glass, white inside  
2 mounting holes  $\varnothing$  5,5 mm  
Distance apart 144 mm  
2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10,5 mm  
Connecting terminal and earth conductor terminal 2,5<sup>2</sup>  
Lampholder E 27  
Safety class I  
Protection class IP 65  
Dust-tight and protection against water jets  
Impact strength IK06  
Protection against mechanical impacts < 1 joule  
 – Safety mark  
 – Conformity mark  
Weight: 3.0 kg

### Lamp

Luminaire with screw base E 27  
Lamp output max. 75 W

Supplied lamp

BEGA LED lamp **13584**  
LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 48%


Additional BEGA LED lamps are available for this luminaire:

- 13586** LED 7 W · 805 lm · 3000 K  
dimmable
- 13588** LED 8 W · 1055 lm · 3000 K
- 13590** LED 12 W · 1400 lm · 3000 K
- 13592** LED 12 W · 1400 lm · 3000 K  
dimmable

Radio-controlled version (Zigbee 3.0):

- 13555** LED 9 W · 805 lm · 2700 K  
dimmable
- 13556** LED 9 W · 805 lm · 2700-6500 K  
dimmable · tunable white
- 13557** LED 9.5 W · 805 lm · 2700-6500 K  
dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

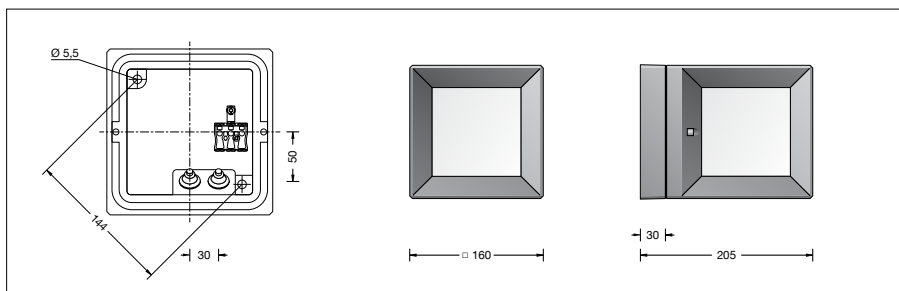

### Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

### Article No. 22 633

Colour graphite or silver  
graphite – article number  
silver – article number + **A**

### Light distribution

