BEGA

Wall luminaire



22 396

Project · Reference number

Date

Product data sheet

Application

Wall luminaire with shielded light source. A luminaire of high protection class and single-sided, downwards directed light sector. For a variety of lighting tasks in interior and exterior lighting applications.

Dark Sky

The light of this luminaire is directed evenly and highly efficiently onto the surface to be illuminated. No light is emitted into the upper half-space of the luminaire.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel BEGA Unidure® coating technology Matt safety glass Silicone gasket 2 mounting holes ø 5 mm Distance apart 172 mm 2 cable entries for through-wiring of mains supply cable ø 7-10.5 mm Connection terminal 2.5 Earth conductor connection Lampholder E 27 Safety class I Protection class IP 65 Dust-tight and protection against water jets Impact strength IK04 Protection against mechanical impacts < 0.5 joule ■ Safety mark
■ C Conformity mark Weight: 1.4 kg

Lamp

Luminaire with screw base E 27 Lamp output max. 60 W This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp 13584

LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 13%

Additional BEGA LED lamps are available for

13586 LED 7 W · 805 lm · 3000 K

dimmable

13 588 LED 8 W · 1055 lm · 3000 K

Radio-controlled version (Zigbee 3.0):

13 555 LED 9 W · 805 lm · 2700 K

dimmable


13556 LED 9 W · 805 lm · 2700 - 6500 K


dimmable · tunable white

LED 9.5 W · 805 lm · 2700 - 6500 K 13557

dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

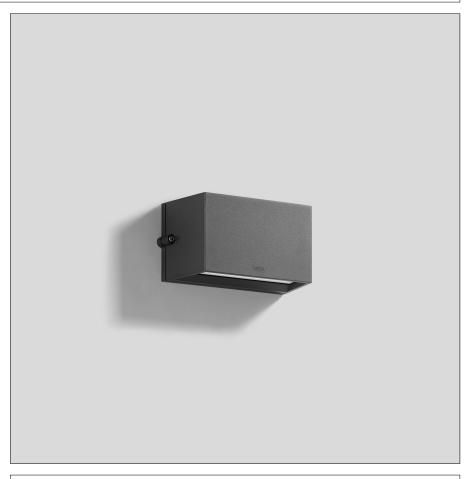

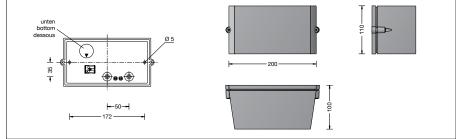

0 %

100 %

Ratio of luminous flux

Luminous flux upper half-space Luminous flux lower half-space

BUG rating according to IES TM-15-07: 0 - 0 - 0

CEN Flux Code according to EN 13032-2: 60-89-99-100-13

Lighting technology Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.

Article No. 22396

Colour optionally graphite, white or silver Graphite - Article number White - Article number + W Silver - Article number + A

Light distribution

