BEGA

Wall Iuminaire

Project · Reference number

Product data sheet

Application

Wall luminaire for many lighting tasks in or on buildings. Luminare distinguished by its high corrosion resistance.

Product description

Luminaire made of copper, brass and stainless steel Antique glass Wall mounting with a mounting plate made of stainless steel, Steel grade number 1.4301 Mounting plate with 2 fixing holes ø 5.5 mm · 70 mm spacing 1 cable entry for mains supply cable up to ø 10,5 mm Connecting terminal 2.5[□] with plug connection Earth conductor connection Lampholder E 27 Safety class I Protection class IP 23 Protected against granular foreign bodies ≥ 12 mm and showers up to 60° 🛣 10 💩 – Safety mark C E - Conformity markWeight: 3.8 kg

Lamp

Luminaire with screw base E 27 Lamp output max. 100 W This product contains light source of energy efficiency class E

Supplied lamp BEGA LED lamp **13590** LED Retrofit 12 W · 1400 lm · 3000 K

Luminaire efficiency: 61%

Additional BEGA LED lamps are available for this luminaire:

 13 584
 LED 7 W · 805 lm · 3000 K

 13 586
 LED 7 W · 805 lm · 3000 K


 dimmable
 LED 8 W · 1055 lm · 3000 K

 13 592
 LED 12 W · 1400 lm · 3000 K

 dimmable
 LED 12 W · 1400 lm · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



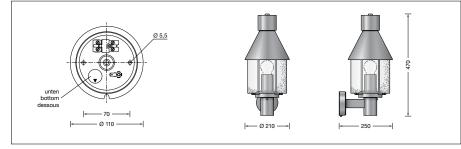

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.

31 441

₹ 10 🙆 IP 23

Date