

Project · Reference number

Date

Product data sheet

Application

Wall luminaire for many lighting tasks on or in buildings.

Luminaire with hand-blown crystal glass for brilliant light.

Product description

Luminaire made of aluminium alloy,

aluminium and stainless steel

Luminaire top made of copper

Crystal glass

Mounting plate with 2 fixing

holes \varnothing 5.5 mm · 70 mm spacing

1 cable entry for mains supply cable

up to \varnothing 10,5 mm

Connection terminal 2.5[□]

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 23


Protected against granular foreign bodies

\geq 12 mm and showers up to 60°

Impact strength IK02

Protection against mechanical

impacts < 0.2 joule

 – Safety mark

CE – Conformity mark

Weight: 3.4 kg

Lamp

Luminaire with screw base E 27

Lamp output max. 100 W

This product contains light source of energy efficiency class E

Supplied lamp

BEGA LED lamp **13590**

LED Retrofit 12 W · 1400 lm · 3000 K

Luminaire efficiency: 77%

Additional BEGA LED lamps are available for this luminaire:


13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimmmable

13588 LED 8 W · 1055 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

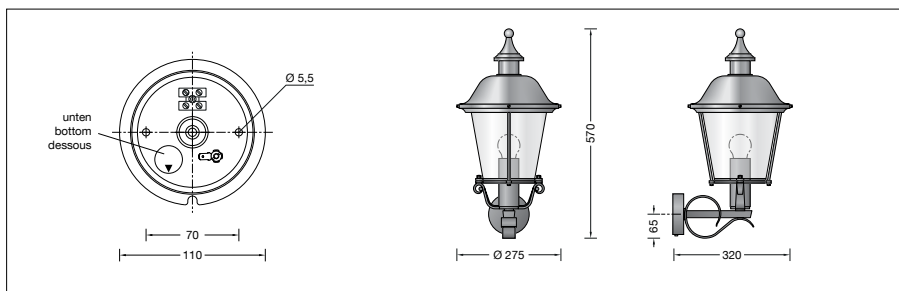

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.

Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at www.bega.com.